


Jandy®

SFTM

Sand Filter - Top Mount

For In-Ground & Aboveground Pools

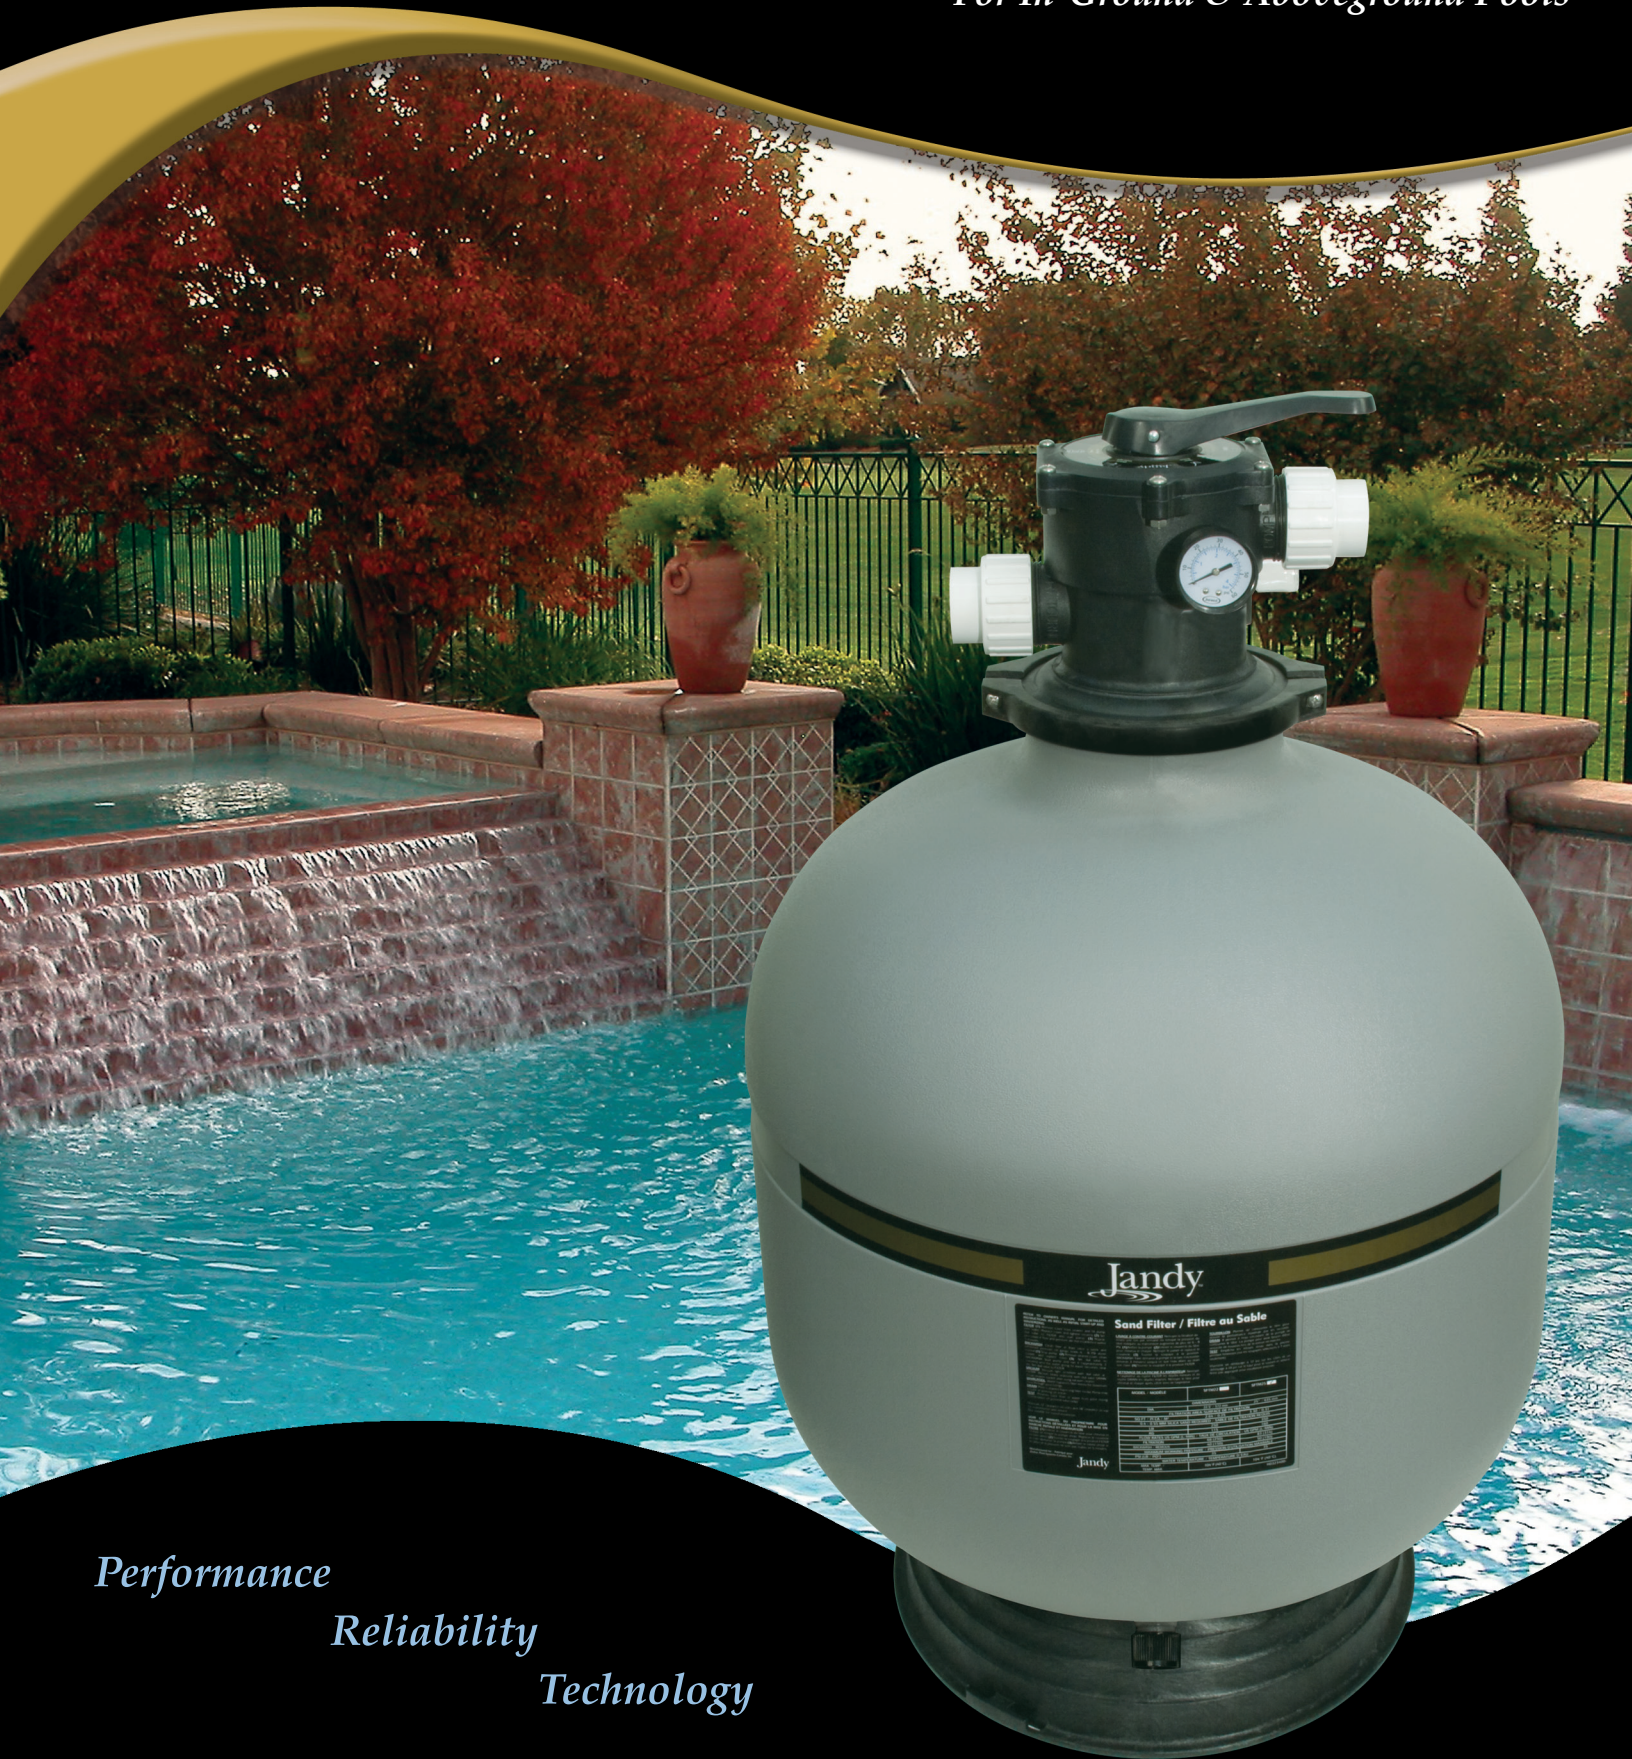

Performance

Reliability

Technology



- Deep high-capacity sand bed carries more debris and extends filter cycles.
- Blow-molded tank is corrosion and UV-resistant.
- Bottom drain for winterizing and draining.
- Available in 22.5" (572 mm) and 25" (635 mm) models.



- Upper Distribution System integrated into the dial valve and engineered to direct water evenly across the entire surface of the sand. Up to 25 gpm/sq.ft (61 m³/h per m²) without sand migration or channeling.
- Non-Corrosive Resin Clamp allows 360° rotation of the dial valve for simple installation alignment and service of dial valve and filter components.



- Heavy-duty, freeze-resistant under-drain with "snap-fit" side-slotted laterals draws water evenly across the full diameter of the sand bed for higher flows, better filtration, longer cycles and more efficient backwashing.



- 7-Way Dial Valve with "sight glass", automatic air relief, and pressure gauge. The 7 functions are:



Backwash Drain Filter Rinse Test Whirlpool Winterize

Performance

Filter model	Area sq.ft.	Flow rate GPM*	Total Gallons Circulated		Sand Req'd	Maximum working pressure
			6 hrs	8 hrs		
SFTM22	2.64	66	23 760	31 680	250 lbs	35 psi
SFTM25	3.30	83	29 880	39 840	350 lbs	35 psi

Notes : Flow rate – GPM/sq.ft.

*Actual system flow rate is dependent on pump selection and plumbing.



ALL JANDY PRODUCTS WORK SEAMLESSLY TOGETHER

Jandy Control Systems manage our complete line of technologically advanced products.

