



Performance
Reliability
Technology



Legacy™ Heaters

Legacy — Value & Efficiency

With 60 years experience as the No. 1 selling brand of pool heaters – Jandy's new Legacy Heater is designed for today's discerning market. Available in two models, the Legacy LRZE (electronic ignition) heater features a technologically-advanced dual-thermostat control, and the LRZM (millivolt ignition) model features a single control with easy on/off switch.

Whichever model you select, it's sure to provide years of dependable service. With our industry-leading 24-point quality check system, you can depend on Legacy's performance and reliability year after year, season after season.

TWO MODELS TO CHOOSE FROM:

The Legacy LRZE



LRZE Control Panel


The LRZE's feature-rich control panel has a user-friendly backlit display and a simplified menu for ease of operation.

The Legacy LRZM



LRZM Control Panel


The LRZM keeps it simple with an easy on/off switch and a single control for pool water temperature maintenance.



Ceramic fiber combustion chamber for lightweight, compact design.



Copper heat exchanger and Flo-Thru baffles provide efficient heat transfer and lower the amount of energy needed to heat your pool.



Reliable hot surface ignition systems provide trouble-free operation on the LRZE model season after season.

Reliability You Can Depend On



*Performance you can rely on...
with 60 years of experience!*

Legacy™ Heaters



Jandy's expertise
and design know-how are
reflected in the technologically-
advanced Legacy Heaters.



LEGACY PERFORMANCE CHARTS

POOL SIZING GUIDE

Model	125		175		250		325		400	
Temp Diff*	Maximum Area Heater (width x length)									
	0 Wind	3 ½ MPH	0 Wind	3 ½ MPH	0 Wind	3 ½ MPH	0 Wind	3 ½ MPH	0 Wind	3 ½ MPH
15°F	875	675	1250	925	1775	1325	2300	1725	2850	2125
20°F	675	500	925	700	1325	1000	1725	1300	2125	1600
25°F	525	400	750	550	1075	800	1400	1050	1700	1300
30°F	450	325	625	475	900	700	1250	875	1425	1075
35°F	400	300	550	400	775	575	1000	750	1225	900

The Pool Sizing Guide shows the maximum pool surface area our Legacy models will heat based on the temperature difference between the air temperature during the coldest month the pool is used and the desired pool temperature. Figures are based on average wind conditions and average pool depth.

SPA SIZING GUIDE

Model	125	175	250	325	400
Spa Size	Time Required to Raise Temp 30°				
200 Gallons	30 Minutes	25 Minutes	20 Minutes	15 Minutes	10 Minutes
400 Gallons	60 Minutes	45 Minutes	30 Minutes	25 Minutes	20 Minutes
600 Gallons	90 Minutes	65 Minutes	45 Minutes	35 Minutes	30 Minutes
800 Gallons	120 Minutes	90 Minutes	60 Minutes	50 Minutes	40 Minutes
1000 Gallons	150 Minutes	110 Minutes	75 Minutes	60 Minutes	50 Minutes

The Spa Sizing Guide details the time required for each model to raise spa temperature by 30°F.


*See your Sales Representative
for more information!*

Specifications:


Model # LRZE / LRZM	BTU Input 1000's (kcal)	"W" Width Inches/cm	"V" Vent Diameter Inches/cm	"H" U.S. Outdoor Stack Inches/cm	"H" U.S. Indoor Stack Inches/cm	Weight Lbs/kg
125	125 (32)	15 1/8 (38)	6 (15)	18 (46)	24 1/8 (61)	145 (66)
175	175 (44)	18 1/8 (40)	6 (15)	18 (46)	24 1/8 (61)	157 (71)
250	250 (63)	22 3/4 (58)	7 (18)	18 1/4 (47)	25 1/4 (64)	174 (79)
325	325 (82)	26 7/8 (68)	8 (20)	18 7/8 (48)	26 1/2 (67)	207 (94)
400	399 (101)	32 3/8 (82)	9 (23)	21 1/2 (55)	27 1/2 (70)	231 (105)

FRONT

Indoor and Outdoor Models



SIDE

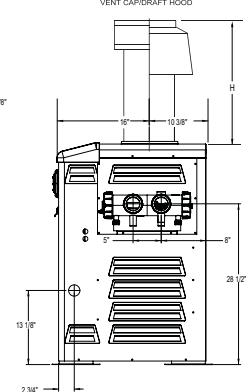

ALL JANDY PRODUCTS WORK SEAMLESSLY TOGETHER

Jandy Control Systems
manage our complete line of
technologically advanced products.



Pumps • Filters • Heaters • Heat Pumps • Controls
Lights • Water Purification • Valves • Water Features • Water Leveling
Cleaners • In-Floor • Pool Covers • Accessories



USA: 1.800.822.7933 • Canada: 1.888.647.4004 • www.jandy.com • info@jandy.com